

Hook blocks with special features

Electromechanically operated retractable hook




- Particularly suitable for large injection moulding die, roll bearings or containers for flat glass transportation
- Can be integrated into all sizes and types of hook block

The hook on this hook block can be opened and closed without limiting the ability to rotate. This is an advantage for loads with a fixed attachment point, which would not be accessible to the person attaching the load without assistance.

The retractable hook is pivoted eccentrically so that it „draws together“ when a load is applied. The closing moment here is greater, for example, than the mass force from a buffer stroke by the crane. The hook is operated electromechanically by means of the shaft and while safeguarding against overloading.

These hook blocks are available from rated hook size 2.5.

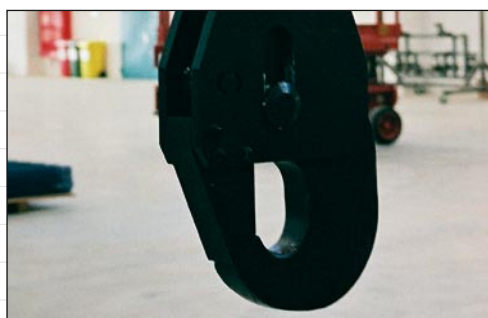

MCD Maschinentechnik
Uwe Richter
Hansestraße 6
37574 Einbeck - Germany

Tel. +49.(0)5561. 924 017
Fax +49.(0)5561. 924 018
info@mcd-tec.de
www.mcd-tec.de