


Standard hook block versions With four rope sheaves

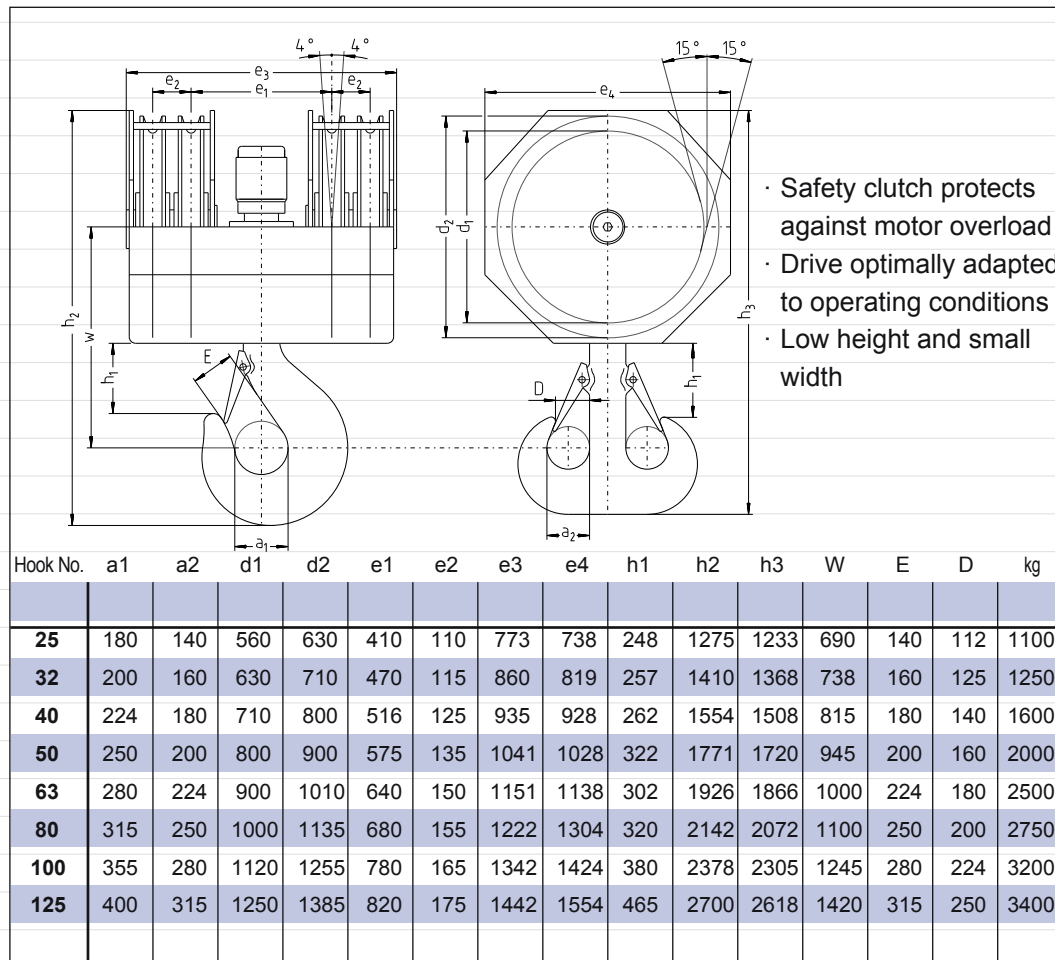

Subject to changes.
Other hook sizes and types on request

Technical characteristics

- Hook sizes and shapes in accordance with DIN 15401 and 15402
- Categorisation in accordance with DIN 15020 or FEM
- Safety catch, spring operated
- screwed, thick-walled plug-in construction
- Welded pulley with roller bearings constructed from circular blanks
- Three-phase geared motors 400V, 50Hz, IP55, suited for frequency control operation
- Motors wired to a terminal box

- Attachment point for cable cord grip (not shown)
- Hook rated speed 1,0 min.⁻¹
- Area of rotation unlimited

MCD Maschinentechnik

Dipl. Ing. Uwe Richter
Hansestr. 6
D - 37574 Einbeck
Tel. +49.(0)5561. 924 017
Fax +49.(0)5561. 924 018
info@mcd-tec.de
www.mcd-tec.de